


Modular Jack Vertical Mount Top Entry Cat5 & 5E



| | |
|---------------------|-----------------|
| 258-8-C5-[*] | Unshielded Cat5 |
| 258-8S-C5 | Shielded Cat5 |
| 258-8S-C5E | Shielded Cat5E |

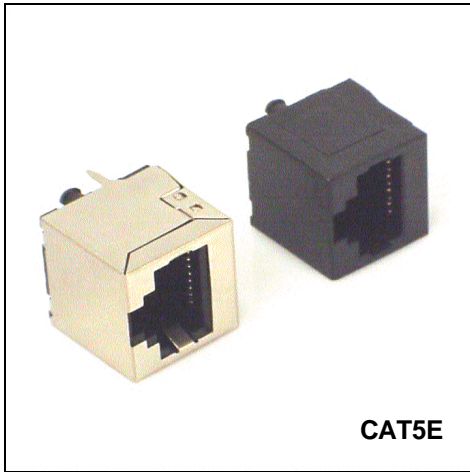

*Type options are:
 Blank: No panel stop
 Ps: Panel stop


ELECTRICAL:

- Dielectric withstanding voltage: 1000 VAC
- Insulation resistance: 500 Megohms minimum
- Contact resistance: 15 milliohms maximum
- Current rating: 1 AMP maximum


MATERIAL:

- Housing: UL94V-0 / glass filled
- Contacts: Phosphor bronze
- Plating: 30µ" gold over nickel
- Operating temperature: -55°C to +105°C

258-8-C5

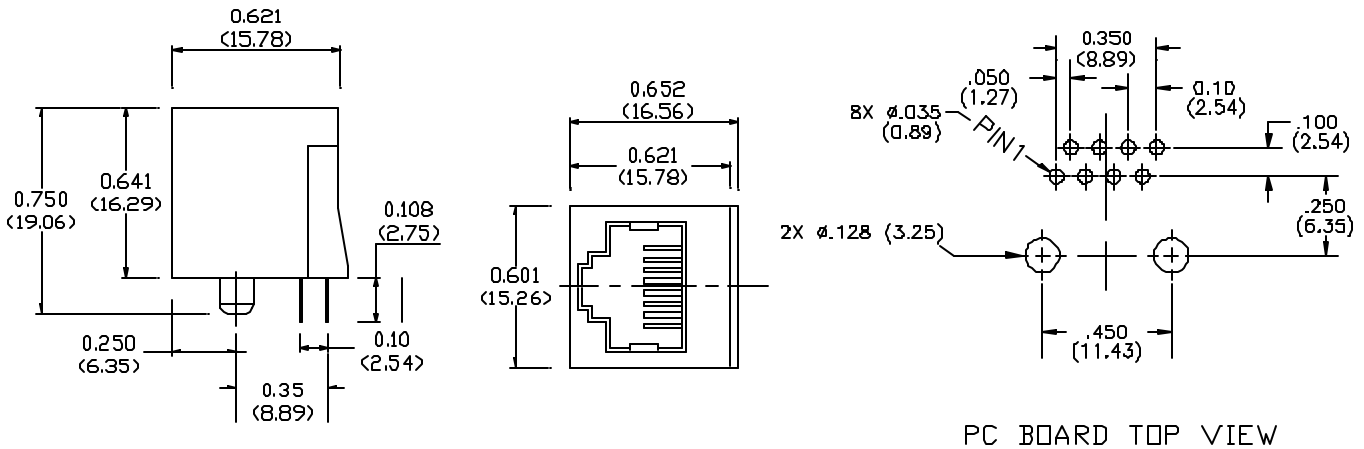

258-8S-C5

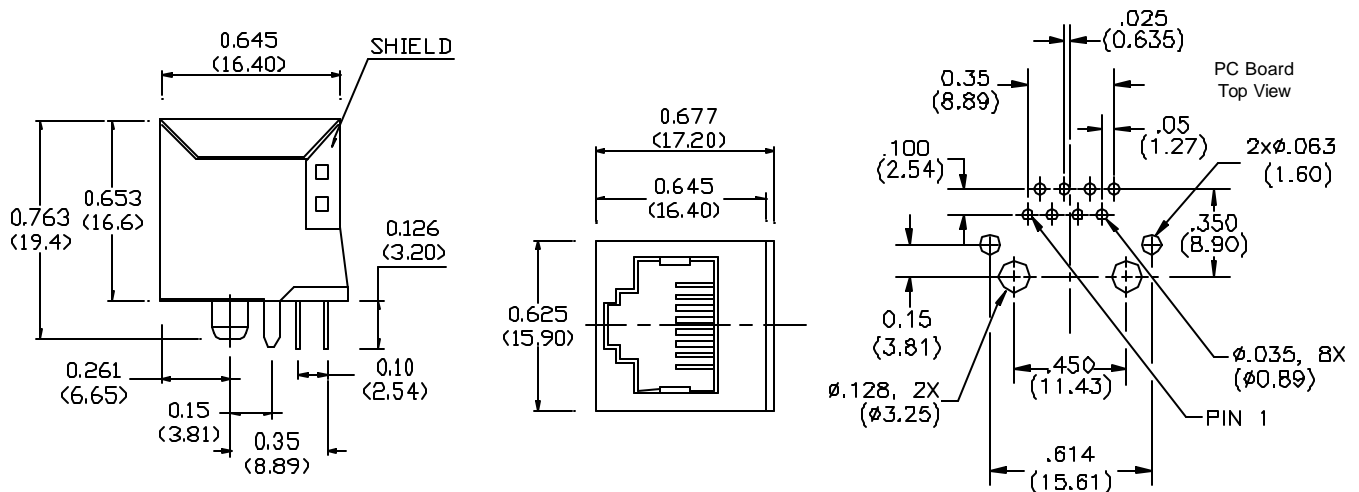

030918