


.100" Pitch Single Row Sockets



4078S-[*] Straight
4078R-[*] Right Angle

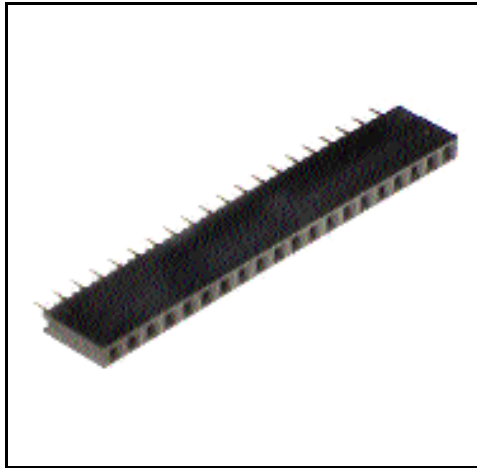

*Number of Contacts; Options are:
2 thru 40 Positions

FEATURES:

- Accepts .025" square contact parts
- Available up to 40 positions
- Mates with Regal #4070 series



ELECTRICAL:

- Current rating: 3 AMP maximum
- Contact resistance: 15 milliohms maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 500 VAC minimum

MATERIAL:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6µ" gold over nickel
- Operating temperature: -55°C to 105°C
- Color: Black

Straight -----

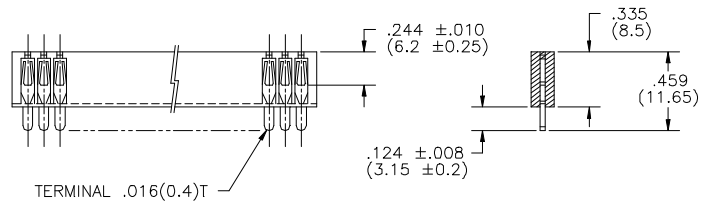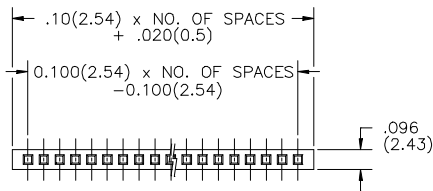

Right Angle -----

