

543-[*]-[**]

*Number of contacts; Options are:

- 4 = 6P4C (6 positions, 4 contacts)
- 6 = 6P6C (6 positions, 6 contacts)
- 8 = 8P8C (8 positions, 8 contacts)
- 10 = 10P10C (10 positions, 10 contacts)

**Type; Options are:

- Blank = unshielded
- N = Unshielded without panel stops
- SS = shielded



FEATURES:

- Low profile design
- Available in 4, 6, 8, 10 contact styles
- Shielded and unshielded


ELECTRICAL:

- Insulation resistance : 500 megohms minimum
- Dielectric withstanding voltage: 1000 VAC
- Contact resistance: 30 milliohms maximum


MATERIAL:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6µ" gold contact area over nickel underplate
- Color: Black
- Operating temperature: -55°C to 105°C

Unshielded

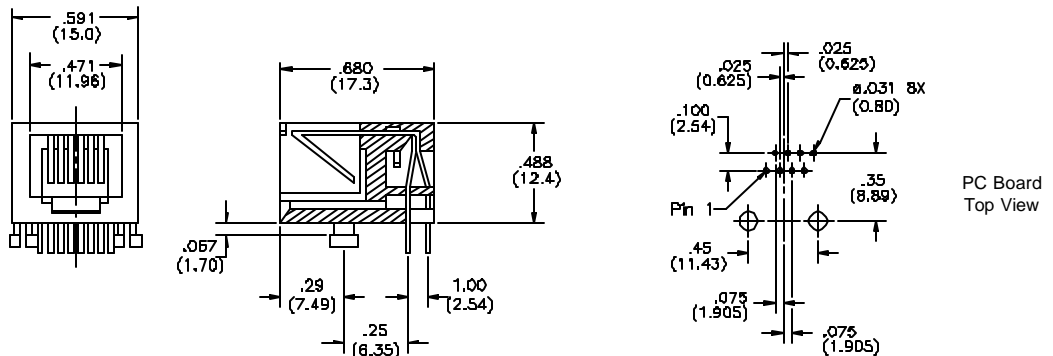

Shielded

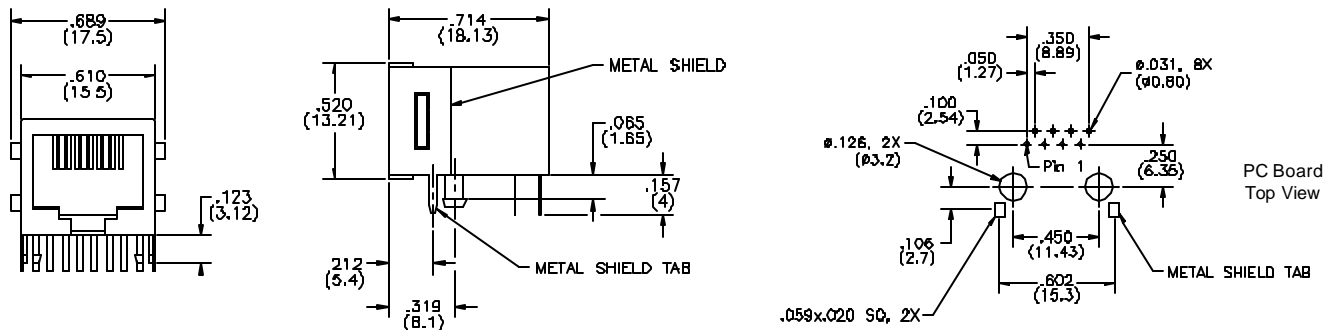

030722