


Modular Jacks - Low Profile .460" Height

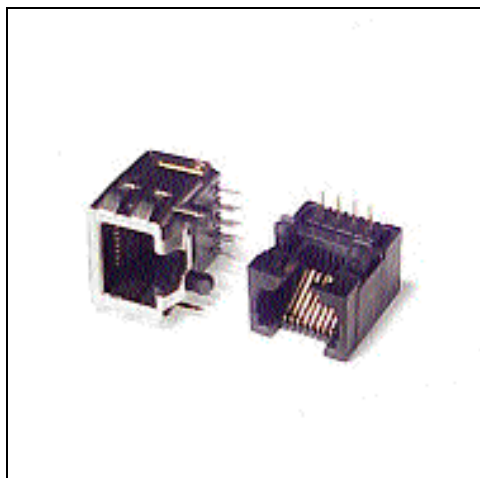

951-[*] .453" Unshielded
951-[*]-PTRAS .460" Shielded, through hole, w / Tabs
951-[*]-NPTRAS .460" Shielded, through hole, w / o Tabs

* Number of contacts; Options are:

- 4 = 6P4C (6 positions, 4 contacts)
- 6 = 6P6C (6 positions, 6 contacts)
- 8 = 8P8C (8 positions, 8 contacts)
- 10 = 10P10C (10 positions, 10 contacts) Available Special order



ELECTRICAL

- Contact resistance: 15 milliohms maximum
- Insulation resistance: 500 Megohms minimum
- Contact rating: 1.5 AMP maximum





FEATURES:

- Ultra low profile
- Through hole mount

MATERIALS:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6u" gold over nickel in contact area
- Temperature rating: -55°C to +125°C

951- Unshielded

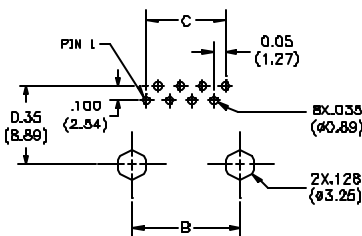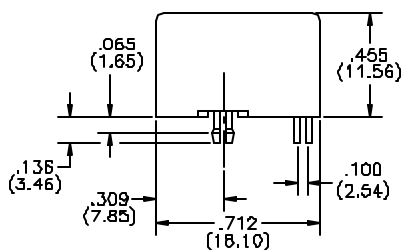

No. of positions	Dimensions		
	A	B	C
4	0.520 (13.21)	0.400 (10.16)	0.150 (3.81)
6	0.520 (13.21)	0.400 (10.16)	0.250 (6.35)
B	0.600 (15.24)	0.450 (11.43)	0.350 (8.89)

951-8-PTRAS

Shielded / through hole PCB

