BNC Right Angle Dual Port Plastic Housing

REGAL ELECTRONICS, INC.

RoHS Compliant

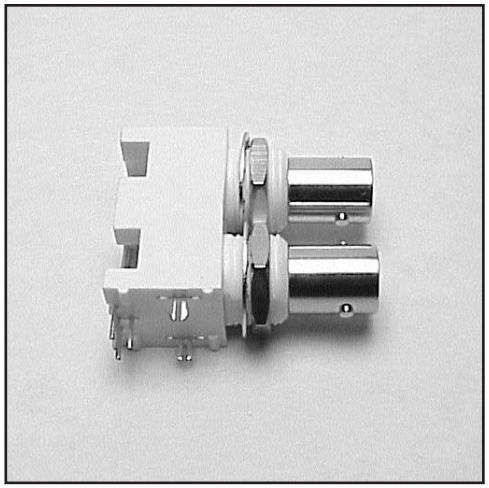

BNC31202-HWV-[*]R

*Ohms; Options are:
50, 75

ELECTRICAL:
- Impedance: 50 & 75 ohms
- Contact resistance: 3.0 milliohms maximum
- Insulation resistance: 5000 Megohms minimum
- Operating Voltage: 500 Volts RMS
- Dielectric withstanding voltage: 1500 VRMS
- Frequency Range: 0-1 GHz

MATERIAL:
- Insulator: Polypropylene UL 94V-0
- Housing: PBT with glass fiber UL 94V-0
- Contacts: Phosphor bronze, Gold Flash
- Mounting post: Tin plating over brass
- Operating Temperature: -55°C to +85°C

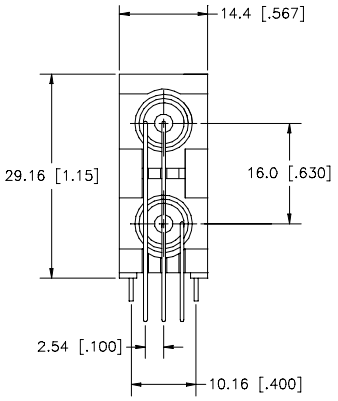

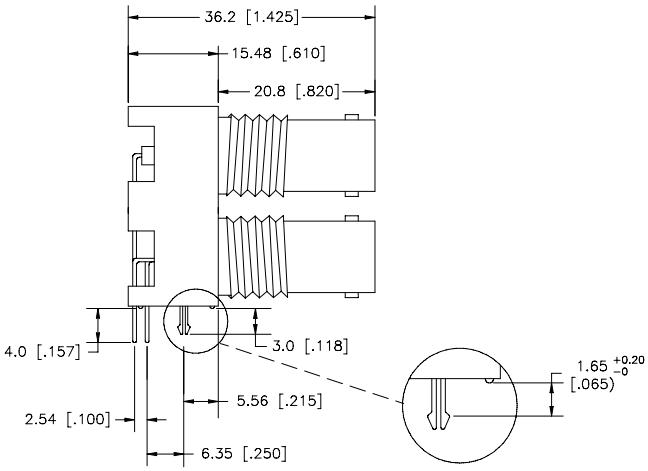



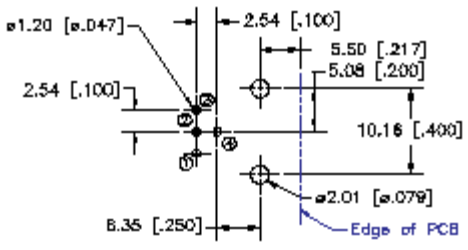

120 San Lucar Court ▼ Sunnyvale, CA 94086 ▼ Phone 800/882-8086 ▼ Fax 800/345-2831
Visit www.regalusa.com ▼ E-mail hal@regalusa.com