



MDJS-[*]P

Number of contacts;
Options are:
3, 4, 5, 6, 7, 8

FEATURES:


- Compact size
- 4, 6, & 8 positions available
- Polarized and keyed to prevent mismatching
- Accepts plug connectors with or without latches

ELECTRICAL:

- Current rating: 1 AMP maximum
- Insulation resistance: 50 Megohms minimum
- Contact resistance: 30 milliohms maximum
- Dielectric withstanding voltage: 250 VAC

MATERIAL:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze 6µ" gold plated
- Operating temperature: -55°C to +105°C
- Color: Black

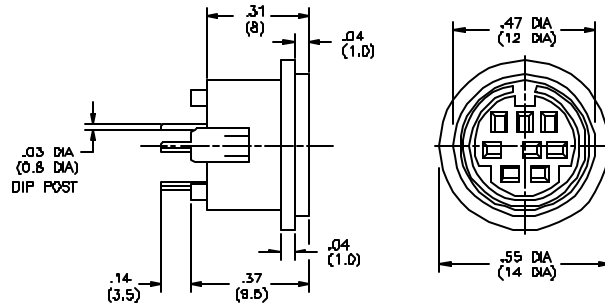

MDJS-3P	MDJS-4P	MDJS-5P	MDJS-6P	MDJS-7P	MDJS-8P