



RoHS Compliant

Standard in  
1,000 foot  
reels



## R1017 - [\*]C - [\*\*] - [\*\*\*]

\*Number of conductors; Options are:  
**4, 6, 8**

\*\*Standard wired gauge; Options are:  
**26 AWG = Standard**  
**28 AWG = Available**

\*\*\*Color; Options are:  
**SS = Silver satin**  
**BK = Black (Not available for 10 conductors)**

### FEATURES:


- Low cost
- Excellent voice or data line cord for cable assemblies
- Mates with Regal #1001 series

### ELECTRICAL:

- Conductor resistance: 2 milliohms maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 500 VAC minimum

### MATERIAL:

- Conductor: Copper wire 7 strand
- Insulation: Polypropylene jacket
- Insulation: PVC

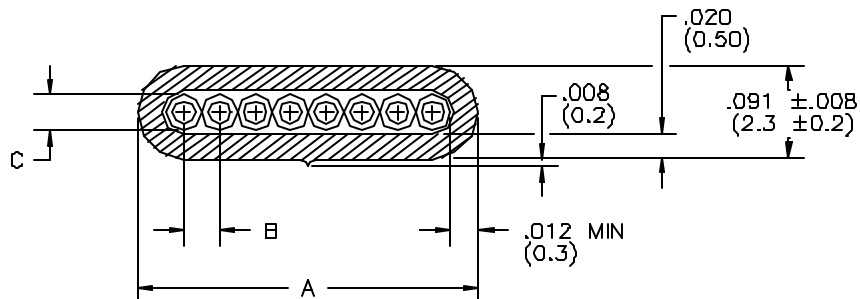

NO. OF CONDUCTORS	ITEM NO.	DIMENSION			INFORM
		A ±.008(0.2)	B	C	
4	#1017-4C-26SS	.189 (4.8)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	BLK, RED, GRN, YEL
6	#1017-6C-26SS	.264 (6.7)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	WHT, BLK, RED, GRN, YEL, BLU
8	#1017-8C-26SS	.343 (8.7)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	GRY, ORN, BLK, RED GRN, YEL, BLU, BRN