



Standard in
1,000 foot
reels



R1017 - [*]C - [**] - [***]

*Number of conductors; Options are:
4, 6, 8

**Standard wired gauge; Options are:
26 AWG = Standard
28 AWG = Available

***Color; Options are:
SS = Silver satin
BK = Black (Not available for 10 conductors)

FEATURES:


- Low cost
- Excellent voice or data line cord for cable assemblies
- Mates with Regal #R1001 series

ELECTRICAL:

- Conductor resistance: 2 milliohms maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 500 VAC minimum

MATERIAL:

- Conductor: Copper wire 7 strand
- Insulation: Polypropylene jacket
- Insulation: PVC

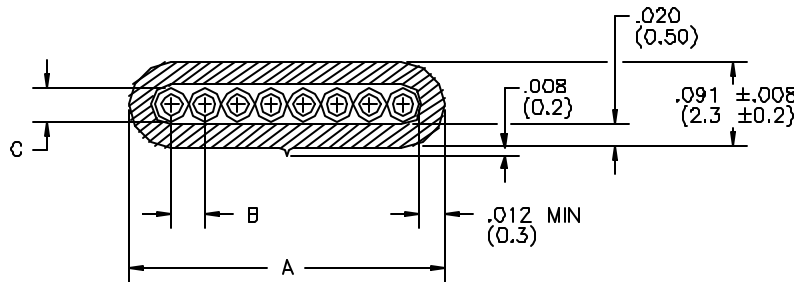

NO. OF CONDUCTORS	ITEM NO.	DIMENSION			INFORM
		A ±.008(0.2)	B	C	
4	R1017-4C-26SS	.189 (4.8)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	BLK, RED, GRN, YEL
6	R1017-6C-26SS	.264 (6.7)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	WHT, BLK, RED, GRN, YEL, BLU
8	R1017-8C-26SS	.343 (8.7)	.035 (0.9)	.035 ±.002 (0.9 ±0.04)	GRY, ORN, BLK, RED GRN, YEL, BLU, BRN