


Modular Jack Vertical Mount Top Entry

RoHS Compliant

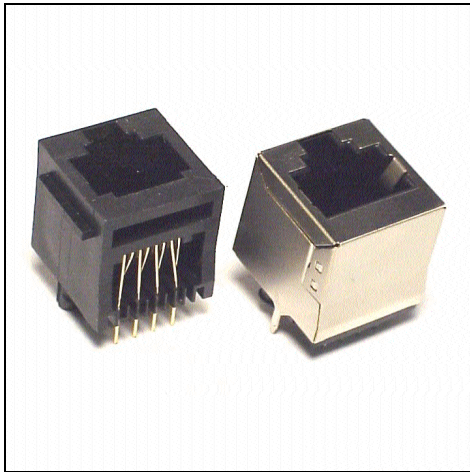

R258-[*] Unshielded
R258-[*]S Shielded

*Number of contacts; Options are:
4 = 6P4C (6 positions, 4 contacts)
6 = 6P6C (6 positions, 6 contacts)
8 = 8P8C (8 positions, 8 contacts)


ELECTRICAL:

- Dielectric withstanding voltage: 1000 VAC
- Insulation resistance: 500 Megohms minimum
- Contact resistance: 15 milliohms maximum
- Current rating: 1 AMP maximum

MATERIAL:

- Housing: UL94V-0 / glass filled
- Contacts: Phosphor bronze
- Plating: 6μ" gold over nickel
- Operating temperature: -55°C to +105°C

R258

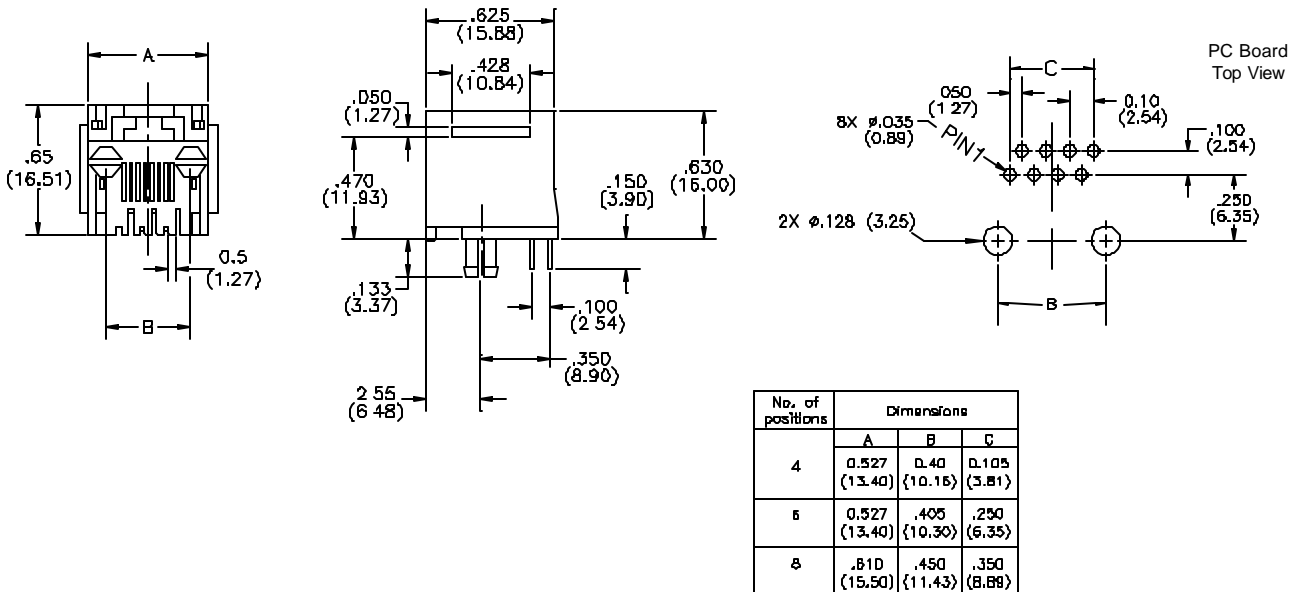

R258-8S

