

R91-5PF-SMT-AB
R91-5PF-SMT-B

RoHS Compliant


ELECTRICAL:

- Current rating: 1 AMP maximum
- Contact resistance: 50 milliohms maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 100 VAC minimum

MATERIAL:

- Insulator: High Temperature Thermoplastic UL94V-0
- Contacts: Copper Alloy
- Plating: Gold flash plated in contact area Tin on solder tail
- Operating temperature: -55°C to +85°C
- Insulator Color: Black
- Shell: Copper Alloy, Tin Plated

R91-5PF-SMT-AB

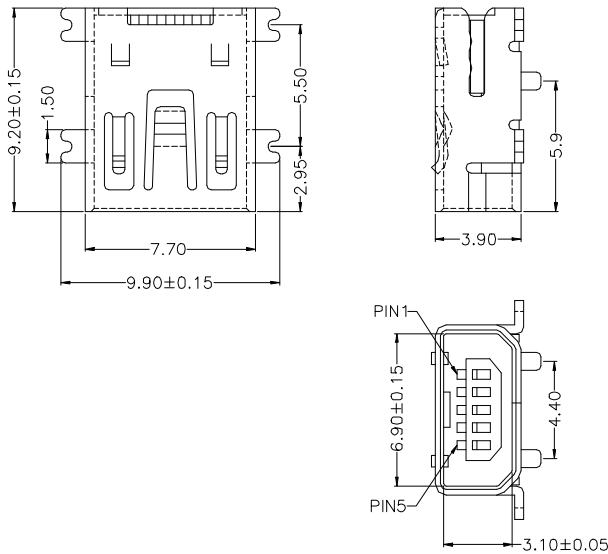

R91-5PF-SMT-B

